



产品外观



- 1 网罩
- 2 螺纹安装口
- 3 安装螺钉

性能指标

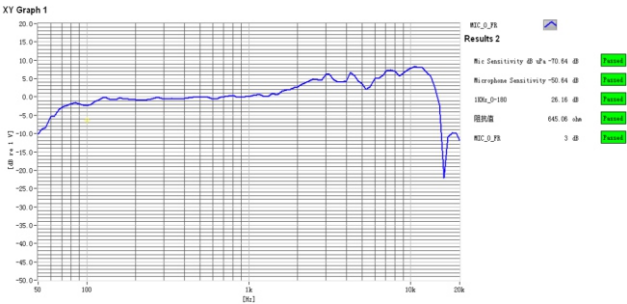


| 项目       | 参数                                          |
|----------|---------------------------------------------|
| 单体       | 动圈式                                         |
| 频率响应     | 100Hz~10KHz                                 |
| 指向性      | 单一指向                                        |
| 灵敏度      | -71dB±3dB(0dB=1V/ u <sub>bar</sub> at 1KHz) |
| 最大声压级SPL | 102dB                                       |
| 输出阻抗     | 600Ω±30%                                    |
| 尺寸 / 重量  | 96g / L=68mm, R <sub>MAX</sub> =52mm        |

# Cartridge Capsule Microphone Manual


M21

## Appearance



- 1 Mesh Cover
- 2 Threaded Mounting Port
- 3 Mounting Thread

## Parameter

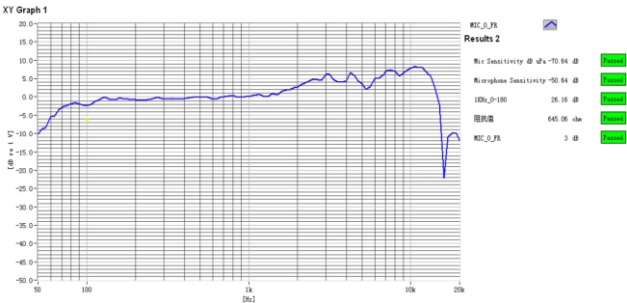

| Item                | Parameter                            |
|---------------------|--------------------------------------|
| MIC Type            | Dynamic                              |
| Frequency Response  | 100HZ-10KHZ (-6dB at 1KHZ)           |
| Directional Pattern | Unidirectional                       |
| Sensitivity         | -71dB±3dB(0dB=1V/ ubar at 1KHz)      |
| MAX SPL             | 102dB                                |
| Output impedance    | 600Ω±30%                             |
| Dimensions/weight   | 96g / L=68mm, R <sub>MAX</sub> =52mm |