


拾音咪头 说明书

Cartridge Capsule Microphone Manual



M45

产品外观



- 1 网罩
- 2 螺纹安装口
- 3 安装螺纹

性能指标

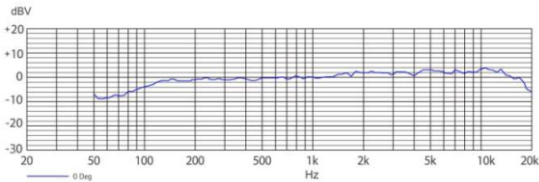


- 200Hz
- 500Hz
- 1KHz
- 2KHz

项目	参数
单体	动圈式
频率响应	50HZ-15KHZ (-6dB at 1KHZ)
指向性	超心型(120°±15° more than 18dB @ 1KHz)
灵敏度	-56dB±3dB (OdB=1v/ pa at 1KHZ)
最大声压级SPL	138dB THD <3% (SPL at 1KHZ)
输出阻抗	300Ω±30%
尺寸 / 重量	96g / L=68mm, R _{MAX} =52mm

Cartridge Capsule Microphone Manual



M45

产品外观



- 1 Mesh Cover
- 2 Threaded Mounting Port
- 3 Mounting Thread

性能指标

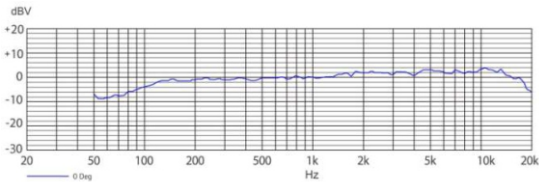

- 200Hz
- 500Hz
- 1KHz
- 2KHz

Item	Parameter
MIC Type	Dynamic
Frequency Response	50HZ-15KHZ (-6dB at 1KHZ)
Directional Pattern	Super Cardioid(120°±15° more than 18dB @ 1KHz)
Sensitivity	-56dB±3dB (OdB=1v/ pa at 1KHZ)
MAX SPL	138dB THD <3% (SPL at 1KHZ)
Output impedance	300Ω±30%
Dimensions / weight	96g / L=68mm, R _{MAX} =52mm