



产品外观




- 1 网罩
- 2 螺纹安装口
- 3 安装螺钉

性能指标

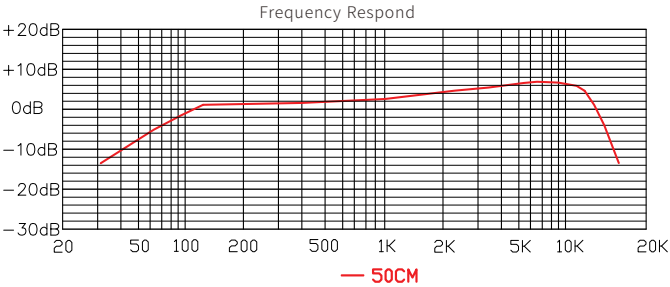

Pattern




项目	参数
单体	动圈式
频率响应	50HZ-15KHZ (-6dB at 1KHZ)
指向性	心型Cardioid
灵敏度	-56dB±3dB (OdB=1v/ pa at 1KHZ)
最大声压级SPL	138dB THD<3% (SPL at 1KHZ)
输出阻抗	300Ω±30%
尺寸 / 重量	110g / L=86mm, RMAX=52mm

Cartridge Capsule Microphone Manual




Appearance




- 1 Mesh Cover
- 2 Threaded Mounting Port
- 3 Mounting Thread

Parameter

Frequency Respond

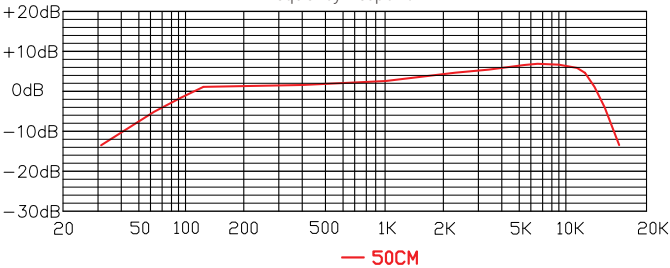

Pattern



Item	Parameter
MIC Type	Dynamic
Frequency Response	50HZ-15KHZ (-6dB at 1KHZ)
Directional Pattern	Cardioid
Sensitivity	-56dB±3dB (OdB=1v/ pa at 1KHZ)
MAX SPL	138dB THD <3% (SPL at 1KHZ)
Output impedance	300Ω±30%
Dimensions/weight	110g / L=86mm, RMAX=52mm